

FREYJA GNSS Receiver

Data Specifications

GNSS Signal Tracking¹	GPS (L1C(A) / L1C / L2P(Y) / L2C / L5) BDS (B1I / B2I / B3I / B1C / B2a / B2b) GLONASS (L1 / L2 / L3*) GALILEO (E1 / E5A / E5B / E6*) QZSS (L1 / L2 / L5 / L6*) IRNSS (L5) SBAS (L1 / L2 / L5) L-Band*
No. of Channels	990+
POSITIONING PERFORMANCE	
High-precision static GNSS Surveying	H:2.5 mm + 0.1 ppm RMS / V:3.5 mm + 0.4 ppm RMS
Static and Fast Static	H:2.5 mm + 0.5 ppm RMS / V:5 mm + 0.5 ppm RMS
Post Processing Kinematic (PPK / Stop & Go)	H:8mm + 1 ppm RMS / V:15 mm + 1 ppm RMS Initialization time: Typically 10 min for base and 5 min for rover Initialization reliability: Typically >99.9%
Code Differential GNSS Positioning	H:±0.25m+1ppmRMS / V:±0.5m+1ppmRMS SBAS:0.5m(H), 0.85m(V) L-Band*: 4cm(H), 10cm(V)
Real Time Kinematic (RTK)	H:8 mm+1ppm RMS / V:15 mm+1 ppm RMS Initialization time: Typically <10 s Initialization reliability: Typically > 99.9%
Time to first Fix	Cold start:< 45 s Hot start:< 30 s Signal re-acquisition:< 2 s
IMU Tilt Survey (Optional)	Additional horizontal pole-tilt uncertainty typically less than 8 mm +0.7 mm / °tilt (2.5 cm accuracy in the inclination of 60°)
COMMUNICATION	
Communication	Bluetooth: BT 5.2, 2.4GHz Wi-Fi: frequency 2.4 GHz, Supports 802.11a / b / g / n Frequency: 410-470 MHz Channel: 116 (16 scalable) Transmitting power: 0.5 W / 1 W Supports multi-communication protocols: TRIMTALK450S, TRIMMARK III, TRANSEOT, SATEL-3AS, etc.
Internal UHF Radio (Optional)	
PHYSICAL	
Internal battery²	Internal 7.2V / 6900mAh lithium-ion rechargeable battery. RTK Rover (UHF/Cellular): up to 24 hours*
External power	Charging:using standard smartphone chargers or external power banks. Weight:≤0.669 kg (includes battery) Dimensions (W×H):132mm×67mm Data storage:8GB ROM internal storage
Control Panel	Satellite, Signal, Power
LED Lamp	1
Physical button	1
Environment	
Water / Dustproof	IP68
Shock and vibration	Designed to survive a 2 m natural fall onto concrete
Humidity	100%, condensing
Operation temperature	-45°C ~ +75°C
Storage temperature	-55°C ~ +85°C
I / O Interface	
1 × USB port, Type C	
1 × SMA antenna connector	
Data Formats	
Output rate	1Hz-20Hz.
Static data format	GNS, Rinex
Network model	VRS, FKP, MAC; supports NTRIP protocol
CMR& RTCM	CMR, RTCM 2.x, RTCM 3.x
Navigation outputs ASCII	NMEA-0183



Headquarters:
GEOSOLUTION | GÖTEBORG AB
Stora Ävägen 21, 436 34 ASKIM,
Sweden
www.satlab.com.se

Make in INDIA Facility:
Xtragen Technologies Pvt Ltd
Gayatri Building, Plot No. 44,
(201-202, 2nd Floor),
80 feet Road, Royal Lake Front
Residency, JP Nagar, Phase – 8,
Bengaluru – 560076,
Karnataka, India
Email: sales@xtragen.in
Phone No.: +91-9500042618

www.xtragen.in



*Description and Specifications are subject to change without notice.
1.Compliant, but subject to availability of IRNSS and Galileo commercial service definition. QZSS L6, L-Band, GALILEO E6 and GLONASS L3 will be provided through future product upgrade.
2.The battery operating time is related to the operating environment, operating temperature and battery life.
3.The accuracy of L-band depends on the equipment observation environment and timing.



FREYJA GNSS Receiver




SatLab Freyja GNSS RTK is a progressive receiver that creates a new RTK experience for land surveyors. With its comprehensive features, it can perfectly handle the situations encountered in all kinds of surveying work, minimizing the burden from the physicality and extending the functionality of fieldwork. By increasing productivity by 25%, Freyja offers an accurate and efficient solution.

Key Features



Applications

- Monitoring
- Land Survey
- Agriculture
- Mapping
- Landfill
- Sensor
- Topography and As-built
- Hydrographic
- UAV Base Station

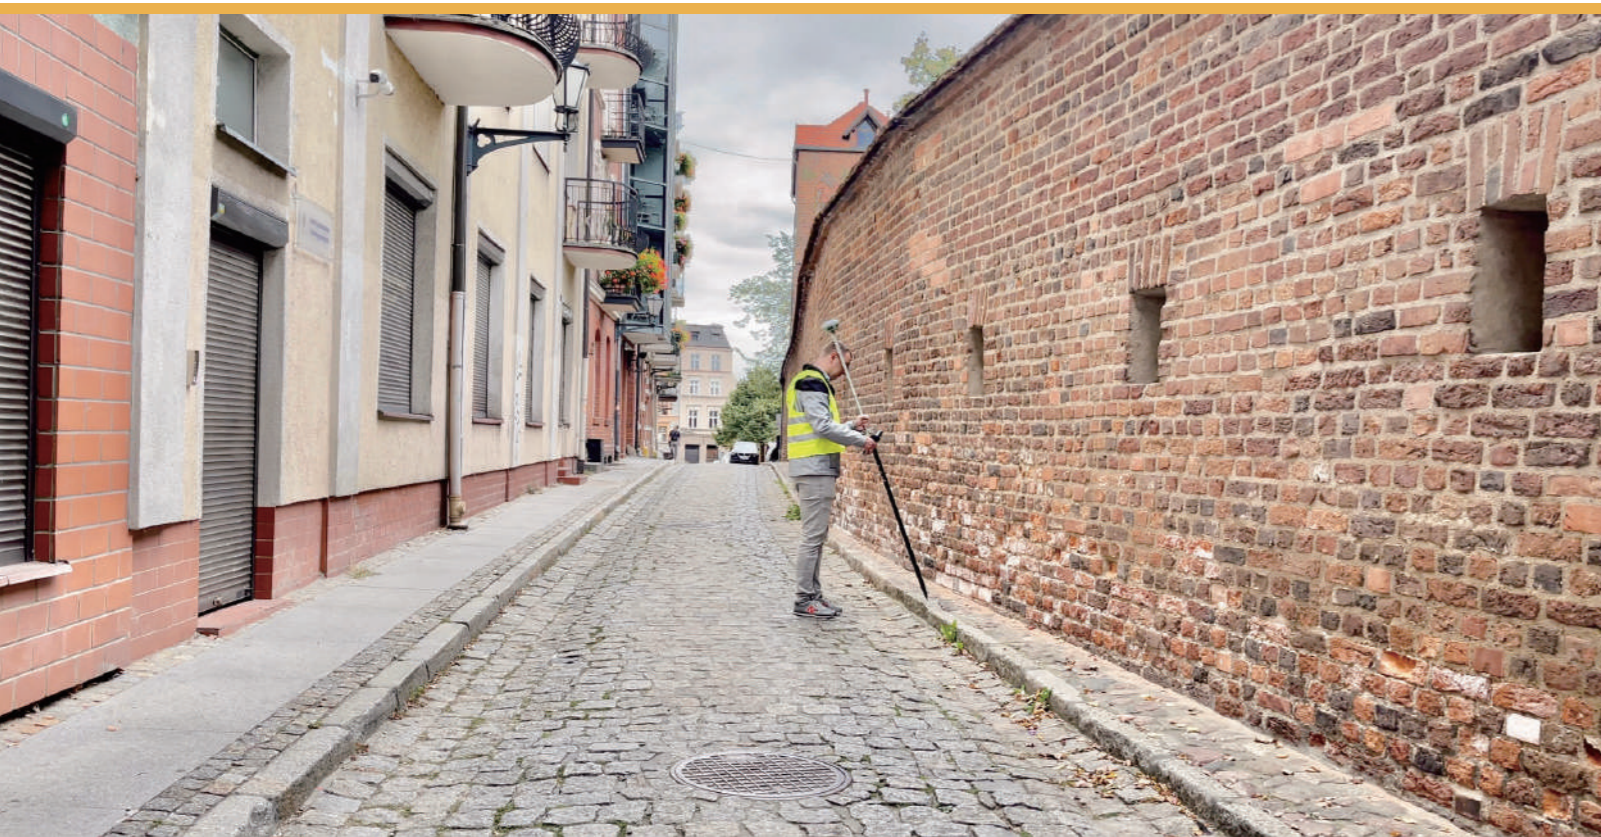

Handiness and Convenience


Refinement of design makes it rugged and compact with only 669g. A more durable battery ensures operating time reaches more than 24 hours. Durability and portability are optimized for surveyors who carry them around a lot in the fieldwork.

Accuracy and Precision

Matured RTK technology promises positioning reliability. New GNSS Antenna, full-constellation and all satellite signal tracking technology lay the solid foundation-precision of fieldwork.

Adaptability and Stability

Equipped with the latest tilt compensation algorithm and built-in high-performance 9-axis Inertial Measurement Unit (IMU), the measurement for hard-to-reach points is simple but precise with the high-performance tilt survey. Quality results are guaranteed even if you lose the signal while under extreme circumstances with great anti-interference ability.

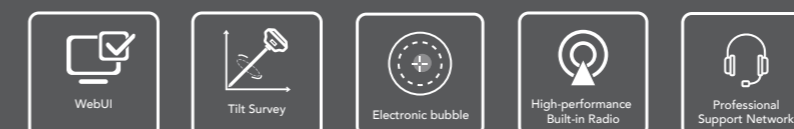

TECHNICAL SUPPORT
Satlab offers online resources and a professional support network available worldwide.